
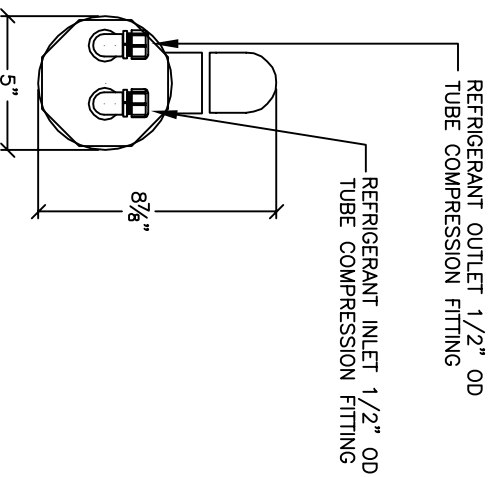



HX-6S THRU HX-12S

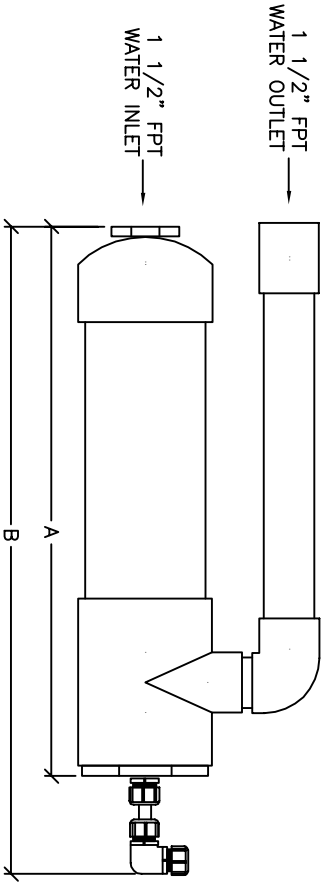

AQUA LOGIC HEAT EXCHANGERS

MODEL #	NOMINAL HP	*NOMINAL BTUH/KW	A	B	WATER FLOW RATE MIN/MAX. (GPM)
HX-2S	1/5	1,800/.5	8 1/2"	11 1/2"	6/12
HX-3S	1/4	3,000/.8	8 1/2"	11 1/2"	8/15
HX-4S	1/3	4,000/1.2	10"	13 1/2"	10/20
HX-6S	1/2	6,000/1.8	11 1/2"	15"	12/25
HX-9S	3/4	9,500/2.6	18"	22"	20/35
HX-12S	1	12,000/3.5	21"	25"	25/40

NOTE: SPECIFICATION CAN CHANGE WITHOUT NOTICE * BTUH RATING IS BASED ON USE OF R-134A REFRIGERANT



TITLE: HX-2S thru HX-12S
HEAT EXCHANGERS

LAST UPDATE: 8-18-06

DATE: 8-18-06

FILE: HX-2S thru HX-12S Specs

BY
CE